



### DESCRIPTION

A visual level switch that can be installed into the side of a reservoir. This easy to install switch is affordable and reliable. It comes with the option of two lengths and the option of a temperature probe.

### FEATURES

- Compact size
- Easy to install
- Visual indicator

### APPLICATIONS

- Water tank
- Hydraulic units
- Level monitoring


### Specifications

Electrical	1A, 20W, 20 VA. 150 VDC/VAC
Electrical Connection	DIN 40050
Protection	IP65
Temperature Range	-4°F to 158°F (-20°C to 70°C)
Tube Material	Methacrylate Tube
Mounting Method	M12 Screws
Maximum Overpressure	72.5 PSI (5 BAR)
Weight	0.5 lbs (0.25 kg)

### Wiring Code

CONTACT	DIN 40050
COMMON	PIN 3
NORMALLY CLOSED	PIN 2
NORMALLY OPEN	PIN 1

### Dimensions

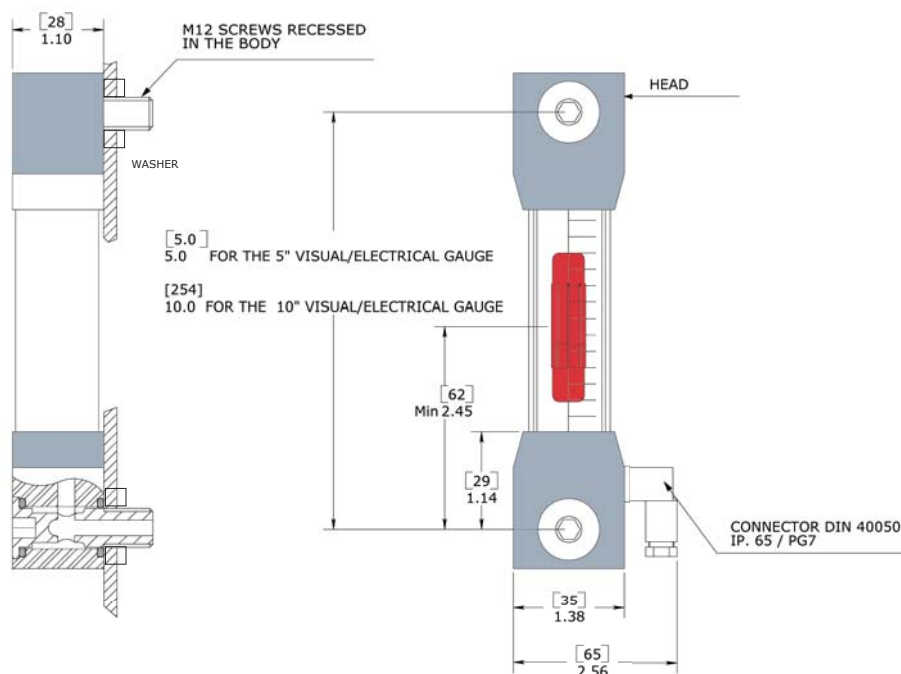

### Ordering Information

Description	5" Visual/Electrical Gauge	10" Visual/Electrical Gauge
Single Pole Double Throw	<b>VE-127-M12-SPDT</b>	<b>VE-254-M12-SPDT</b>
Single Pole Double Throw with Temperature Probe	<b>VE-127-M12-SPDT-T</b>	<b>VE-254-M12-SPDT-T</b>